


GEN-AU3

Audio Cable

3 Conductor 24 AWG

24 AWG stranded high-conductivity bare copper conductors, PVC insulation, double bare copper spiral shield, PVC jacket

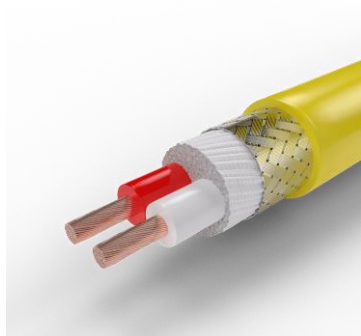

TECHNICAL SPECIFICATIONS

| | |
|-----------------------|--------------------------------------|
| Conductor | 22-26 AWG, Bare Copper, 3 Conductors |
| Insulation | PVC |
| Outer shield | Braided, Bare Copper |
| Outer Jacket | PVC |
| Impedance | 47 Ohm |
| Current | 4 Amps/conductor |
| Voltage | 300 V |
| Nominal Inductance | 0.19 μ H/ft |
| Capacitance | 110 pF/ft |
| Max. Pull Tension: | 45 lbs |
| Temperature | -20°C to +80°C |
| Suitability - Indoor: | Yes |