


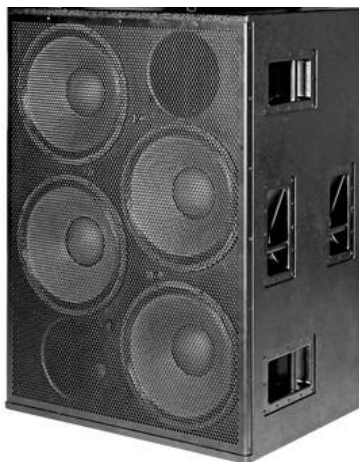

Parameter	Specification	
Model	GEN-LS215	GEN-LS415
Power	LF: 900W x 2; MF/HF: 300W(RMS)	LF: 900W x 2; MF/HF: 400W(RMS)
Driver	1 x 3" HF, 1 x 4" MF, 2 x 15" LF	1 x 3" HF, 1 x 4" MF, 4 x 15" LF
Frequency Response	20 Hz ~ 20 kHz	
Max SPL @ 1m	142/146dB(Max)	
Dispersion	130° Conical	
Sensitivity (1W @ 1m)	LF: 115dB x 2; MF/HF: 121dB	
Nominal Impedance (Ohm)	8Ω	
Input Connectors	2 x NL4	
Cabinet	MDF	
Grille	Steel, powder coated	