

Front Panel

① **Power LED:** The LED illuminates green when the device is power on. 2

② **INPUT:**

**IN 1 LED:** The LED illuminates blue when the IN 1(HDMI input) is selected.

**IN 2 LED:** The LED illuminates blue when the IN 2(USB-C input) is selected.

**AUTO LED:** When entering the automatic switching mode, the LED illuminates blue, otherwise it turns off.

**SELECT AUTO/3s:** 1x white non-luminous button, click to switch host, long press for 3 seconds to enter/exit automatic mode.

③ **DISPLAY:**

Press **ON** to turn on the display.

Press **OFF** to turn off the display.


Press  to mute/unmute display audio.

Press  to decrease the audio volume gradually, or press and hold it to decrease the audio volume constantly.

Press  to increase the audio volume gradually, or press and hold it to increase the audio volume constantly.

④ **EDID/HDCP:** 4-pin DIP switch for EDID/HDCP setting. 5

⑤ **FW:** USB-C port for firmware upgrade.

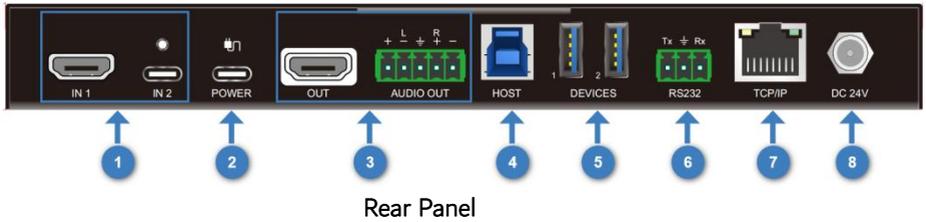

**Rear Panel**

- ① **IN1:** Type-A female HDMI input port to connect HDMI video source. **IN2:** Type-C USB with charging capability to connect the source device.
- ② **POWER:** Type-C USB connect external PD PSU to charge USB-C IN.
- ③ **OUTPUT:**  
**OUT:** Type-A female HDMI output port to connect video display.  
**AUDIO OUT:** 5-pin terminal block for balanced audio output.
- ④ **HOST:** Type-B USB ports for host connection.
- ⑤ **DEVICES:** Two type-A USB ports to connect KVM devices (e.g. microphone and camera);  
  
 Each device port provides 5V 900mA power supply.
- ⑥ **RS232:** 3-pin terminal block to connect control device (e.g. PC) or third-party device for RS232 control.
- ⑦ **TCP/IP:** 1 x RJ45, GUI control.
- ⑧ **DC 24V:** DC barrel port for power adapter connection.

## Specification

<b>Video</b>	
Video Input	(1) HDMI,(1) USB-C
Video Input Connector	(1) Type-A female HDMI,(1) Type-C USB
Video Input Resolution	Up to 4K@60Hz 4:4:4
Video Output	(1) HDMI
Video Output Connector	(1) Type-A female HDMI
Video Output Resolution	Up to 4K@60Hz 4:4:4
HDMI Version	2.0
HDCP Version	2.2
USB Version	USB 3.2 Gen1
HDR 10	Supported
CEC	Yes
HPD	Supported
<b>Audio</b>	
Audio Output	(1) AUDIO OUT (Stereo balanced L/R)
Audio Output Connector	(1) 5-pin terminal block
HDMI Audio Format	LPCM 7.1 audio, Dolby Atmos®, Dolby® TrueHD, Dolby Digital® Plus, DTS: X™, and DTS-HD® Master Audio™ pass-through
<b>Control Part</b>	
Control	(1) EDID, (1) RS232, (1) TCP/IP
Control Connector	(1) 4-pin DIP switch, (1) 3-pin terminal block, (1) RJ-45
<b>DEVICES</b>	
Connector	(2)Type-A USB
USB Version	USB 3.2 Gen1
<b>General</b>	
HDMI 2.0 Cable Length	4K@60Hz 4:4:4 ≤ 5m 4K@60Hz 4:2:0 ≤ 10m 4K@30Hz 4:4:4 ≤ 10m 1080P ≤ 15m
Bandwidth	18Gbps
Operation Temperature	-5°C ~ +55°C
Storage Temperature	-25°C ~ +70°C
Relative Humidity	10% ~ 90%
External Power Supply	DC 24V 1.25A
Dimension (W*H*D)	215.0mm x 24.5mm x 120.0mm
Net Weight	625g